

Part number:  
**44201-0102**

### Copyright

© 2013, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

May 29, 2013, 04:39 AM

### Corporate Headquarters

FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
USA  
Telephone: +1-503-498-3547

### Website

<http://www.flir.com>

### Customer support

<http://support.flir.com>

### Legal disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply.

Information and equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited.



### General description

Optical gas imaging especially of SF6 and ammonia

The FLIR GF306 is an IR camera for optical gas imaging (OGI) that visualizes and pinpoints gas leaks of SF6 and ammonia, without the need to de-energize high-voltage equipment or shut down the operation. The portable camera also greatly improves operator safety, by detecting emissions at a safe distance, and helps to protect the environment by tracing leaks of environmentally harmful gases.

SF6 is used in the electric power industry as an insulator and quenching medium for gas-insulated substations and circuit breakers. The gas is also used in magnesium production and semiconductor manufacture. Ammonia is produced in ammonia plants, and is used mainly for the production of fertilizers.

### Benefits:

- Improved efficiency: The FLIR GF306 reduces revenue loss by pinpointing even small gas leaks quickly and efficiently, and from a distance. It also reduces the inspection time by allowing a broad area to be scanned rapidly and without the need to de-energize components in the high-voltage area. The wireless connectivity of the camera allows you to connect to smart phones or tablet PCs for the wireless transfer of images or remote control of the camera. The FLIR GF306 can also be used for temperature measurement, which makes it even more useful for predictive maintenance of high-voltage equipment.
- Increased worker safety: OGI allows gas leaks to be detected in a non-contact mode and from a safe distance. This prevents electrical exposure to personnel working in a high-voltage area. With a GF306 gas imaging camera it is easy to scan areas of interest that are difficult to reach with conventional methods. The camera is ergonomically designed, with a bright LCD and tiltable viewfinder, which facilitates its use over a full working day.
- Protecting the environment: SF6 is a well-known greenhouse gas that can cause harm to the environment, and is usually governed by regulations. SF6 has a global warming potential 24,000 times higher than CO2. Even small leaks can be detected and documented using the FLIR GF306 camera.

Detects the following gases:

Sulfur Hexafluoride (SF6), Acetyl Chloride, Acetic Acid, Allyl Bromide, Allyl Chloride, Allyl Fluoride, Ammonia (NH3), Bromomethane, Chlorine Dioxide, Ethyl Cyanoacrylate, Ethylene, Furan, Hydrazine, Methylsilane, Methyl Ethyl Ketone, Methyl Vinyl Ketone, Propenal, Propene, R 134a, Tetrahydrofuran, Trichloroethylene, Uranyl Fluoride, Vinyl Chloride, Vinyl Cyanide, Vinyl Ether

### Licensing and classification

License information

Interchangeable lens version of the FLIR GF3XX series requires US Department of State License and will be subject to limitations on resale, except inside US. Allow a minimum of 90 days after application submittal for approval.

### Imaging and optical data

IR resolution	320 × 240 pixels
Thermal sensitivity/NETD	<15 mK @ +30°C (+86°F)
Field of view (FOV) / Minimum focus distance	24° × 18° / 0.3 m (1.0 ft.)
Focal length	23 mm (0.89 in.)
F-number	1.5
Focus	Automatic (one touch) or manual (electric or on the lens)
Zoom	1–8× continuous, digital zoom
Digital image enhancement	Noise reduction filter, High Sensitivity Mode (HSM)

### Detector data

Focal Plane Array (FPA) / Spectral range	Cooled QWIP / 10.3–10.7 μm
Sensor cooling	Stirling Microcooler (FLIR MC-3)

P/N: 44201-0102

© 2013, FLIR Systems, Inc.  
All rights reserved worldwide.

## Detector data

Detects following gases	Sulfur Hexafluoride (SF6), Acetyl Chloride, Acetic Acid, Allyl Bromide, Allyl Chloride, Allyl Fluoride, Ammonia (NH3), Bromomethane, Chlorine Dioxide, Ethyl Cyanoacrylate, Ethylene, Furan, Hydrazine, Methylsilane, Methyl Ethyl Ketone, Methyl Vinyl Ketone, Propenal, Propene, R 134a, Tetrahydrofuran, Trichloroethylene, Uranyl Fluoride, Vinyl Chloride, Vinyl Cyanide, Vinyl Ether
-------------------------	--

## Electronics and data rate

Full frame rate	60 Hz
-----------------	-------

## Image presentation

Display	Built-in widescreen, 4.3 in. LCD, 800 x 480 pixels
Viewfinder	Built-in, tiltable OLED, 800 x 480 pixels
Automatic image adjustment	Continuous/manual; linear or histogram based
Manual image adjustment	Level/span
Image modes	IR-image, visual image, High Sensitivity Mode (HSM)

## Measurement

Temperature range	-40°C to +500°C (-40°F to +932°F)
Accuracy	±1°C (±1.8°F) for temperature range (0°C, to +100°C, +32°F to +212°F) or ±2% of reading for temperature range (>+100°C, >+212°F)

## Measurement analysis

Spotmeter	10
Area	5 boxes with max./min./average
Profile	1 live line (horizontal or vertical)
Difference temperature	Delta temperature between measurement functions or reference temperature
Reference temperature	Manually set or captured from any measurement function
Emissivity correction	Variable from 0.01 to 1.0 or selected from editable materials list
Measurement corrections	Reflected temperature, distance, atmospheric transmission, humidity, external optics

## Set-up

Menu commands	Level, span Auto adjust continuous/manual/semi-automatic Zoom Palette Start/stop recording Store image Playback/recall image
Color palettes	Iron, Gray, Rainbow, Arctic, Lava, Rainbow HC
Set-up commands	1 programmable button, overlay recording mode, local adaptation of units, language, date and time formats

## Storage of images

Storage media	Removable SD or SDHC memory card, two card slots
Image storage capacity	> 1200 images (JPEG) with post process capability per GB on memory card
Image storage mode	IR/visual images Visual image can automatically be associated with corresponding IR image
Periodic image storage	Every 10 seconds up to 24 hours
File formats	Standard JPEG, 14 bit measurement data included
GPS	Location data automatically added to every image from built-in GPS

P/N: 44201-0102

© 2013, FLIR Systems, Inc.  
All rights reserved worldwide.

## Video recording in camera and video streaming

Non-radiometric IR-video recording	MPEG4 (up to 60 minutes/clip) to memory card. Visual image can automatically be associated with corresponding recording of non-radiometric IR-video.
Visual video recording	MPEG4 (25 minutes/clip) to memory card
Radiometric IR-video streaming	Full dynamic to PC using USB or WLAN
Non-radiometric IR-video streaming	RTP/MPEG4
Visual video streaming	MPEG-4 using WLAN (using Wi-Fi USB micro adapter) Uncompressed colorized video using USB

## Digital camera

Built-in digital camera	3.2 Mpixel, auto focus, and two video lamps
-------------------------	---

## Laser pointer

Laser	Activated by dedicated button
-------	-------------------------------

## Data communication interfaces

WLAN	Peer to peer (ad-hoc) for iOS or infrastructure (network) for Android, using Wi-Fi USB micro adapter
USB	<ul style="list-style-type: none"> <li>USB-A: Connect external USB device</li> <li>USB Mini-B: Data transfer to and from PC</li> </ul>
USB, standard	USB Mini-B: 2.0 High Speed
Video out	Digital Video Output (image)

## Power system

Battery type	Rechargeable Li Ion battery
Battery voltage	7.2 V
Battery capacity	4.4 Ah
Battery operating time	> 2 hours at 25°C (+68°F) and typical use
Charging system	In camera (AC adapter or 12 V from a vehicle) or 2-bay charger
Start-up time	Typically 10 min. @ 25°C (+77°F)

## Environmental data

Operating temperature range	-20°C to +40°C (-4°F to +104°F)
Storage temperature range	-30°C to +60°C (-22°F to +140°F)
Humidity (operating and storage)	IEC 68-2-30/24 h 95% relative humidity +25°C to +40°C (+77°F to +104°F) (2 cycl)
EMC	<ul style="list-style-type: none"> <li>EN61000-6-4 (Emission)</li> <li>EN61000-6-2 (Immunity)</li> <li>FCC 47 CFR Part 15 class A (Emission)</li> <li>EN 61 000-4-8, L5</li> </ul>
Encapsulation	IP 54 (IEC 60529)
Bump	25 g (IEC 60068-2-29)
Vibration	2 g (IEC 60068-2-6)

## Physical data

Camera weight, incl. lens and battery	2.48 kg (5.47 lb.)
Cameras size, incl. lens (L x W x H)	306 x 169 x 161 mm (12.0 x 6.7 x 6.3 in.)
Tripod mounting	UNC ¼"-20



---

**P/N: 44201-0102**






© 2013, FLIR Systems, Inc.  
All rights reserved worldwide.

---

## Shipping information

- Hard transport case
  - Infrared camera with lens
  - Battery charger
  - Battery, 2 ea.
  - Calibration certificate
  - Downloads brochure
  - FLIR Tools software
  - FLIR VideoReport™ PC software CD-ROM
  - HDMI-DVI cable
  - HDMI-HDMI cable
  - Lens cap (2 ea.)
  - Lens cap (mounted on lens)
  - Memory card
  - Memory card adapter
  - Power supply, incl. multi-plugs
  - Printed Getting Started Guide
  - Printed Important Information Guide
  - Registration card
  - Service & training brochure
  - Shoulder strap
  - USB cable
  - User documentation CD-ROM
  - Wi-Fi USB micro adapter (depending on CE and FCC regulations regarding wireless equipment for your country)
-






# Camera housing

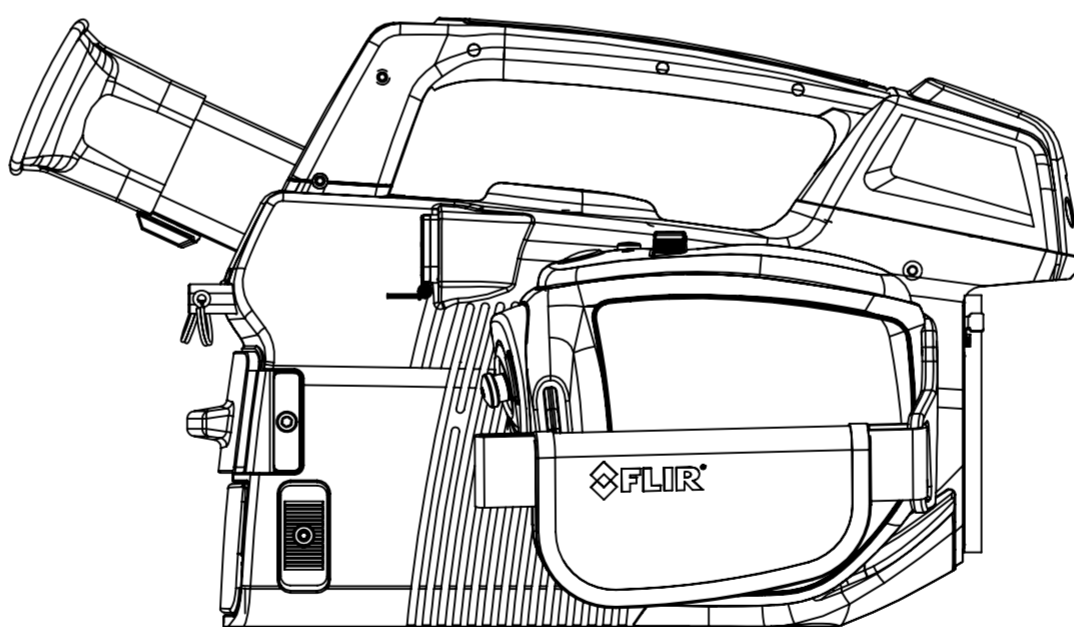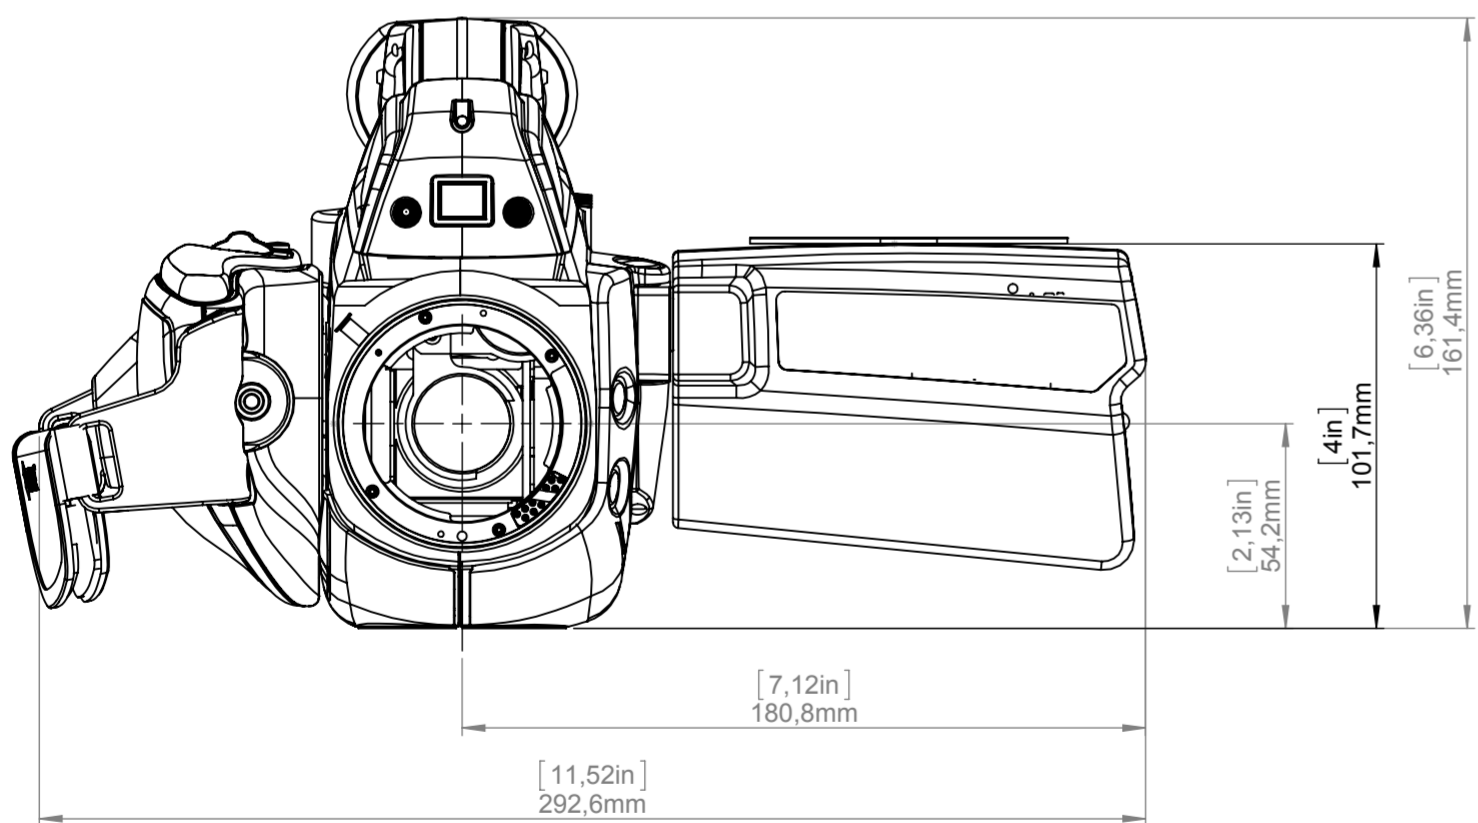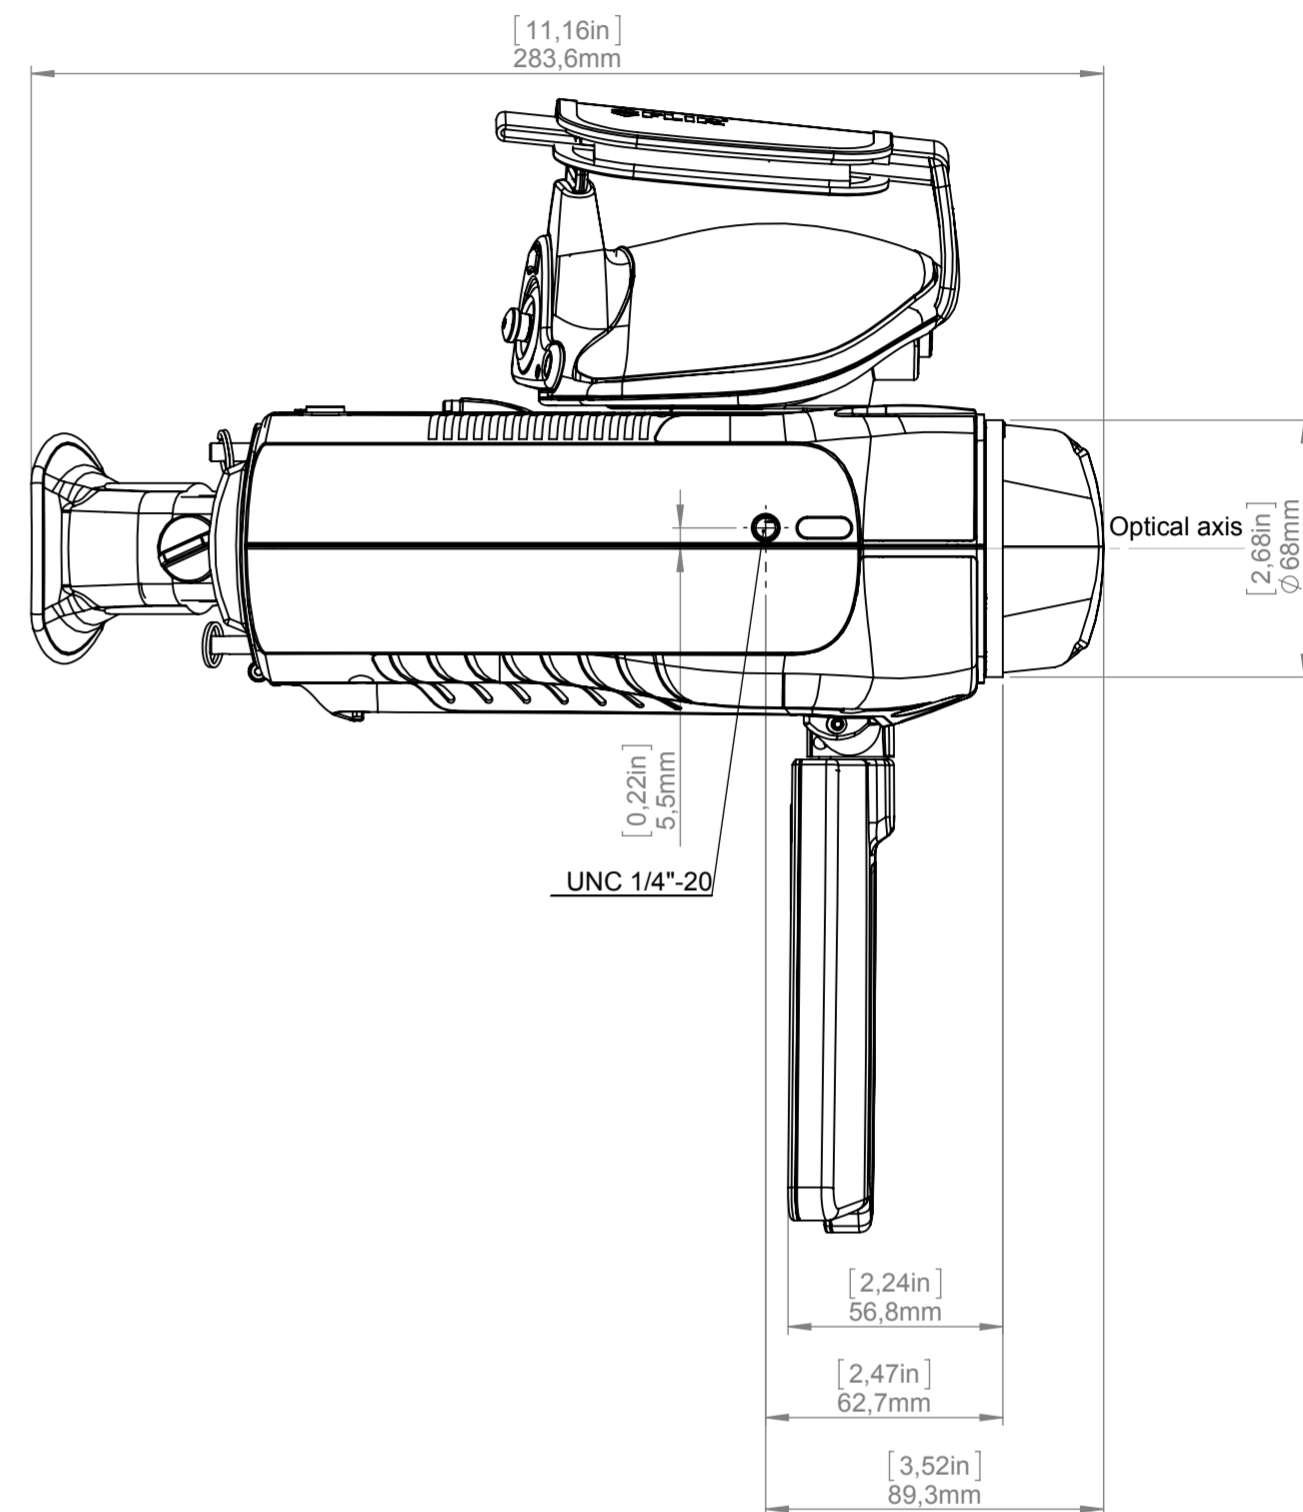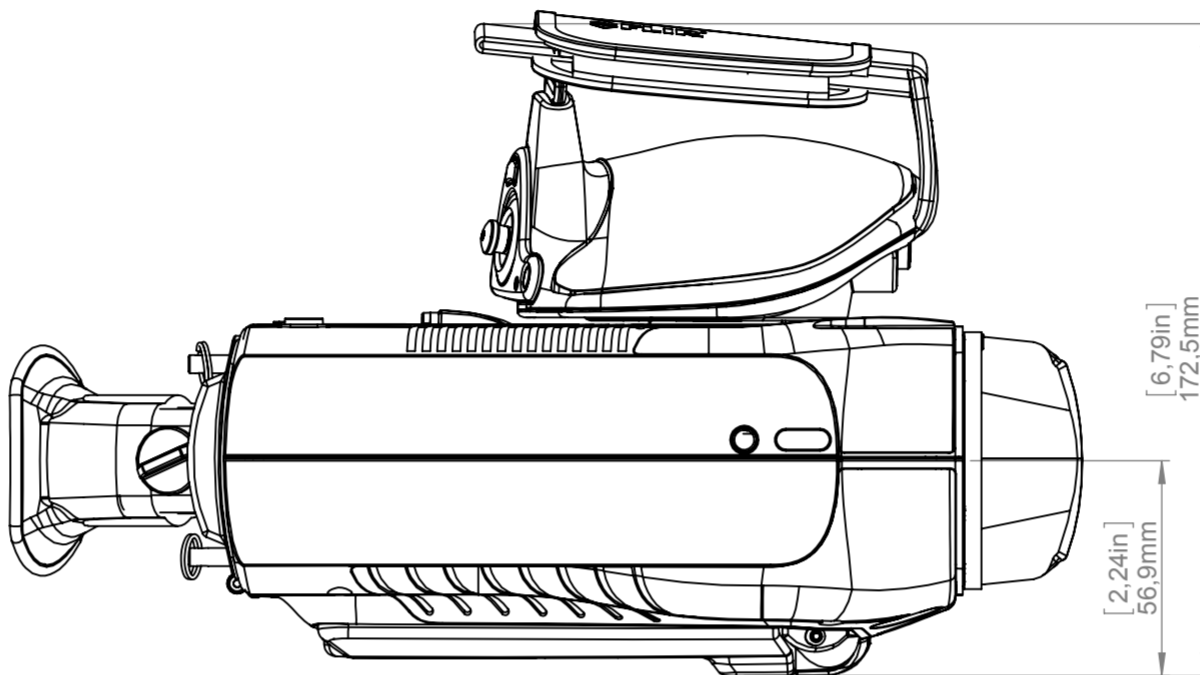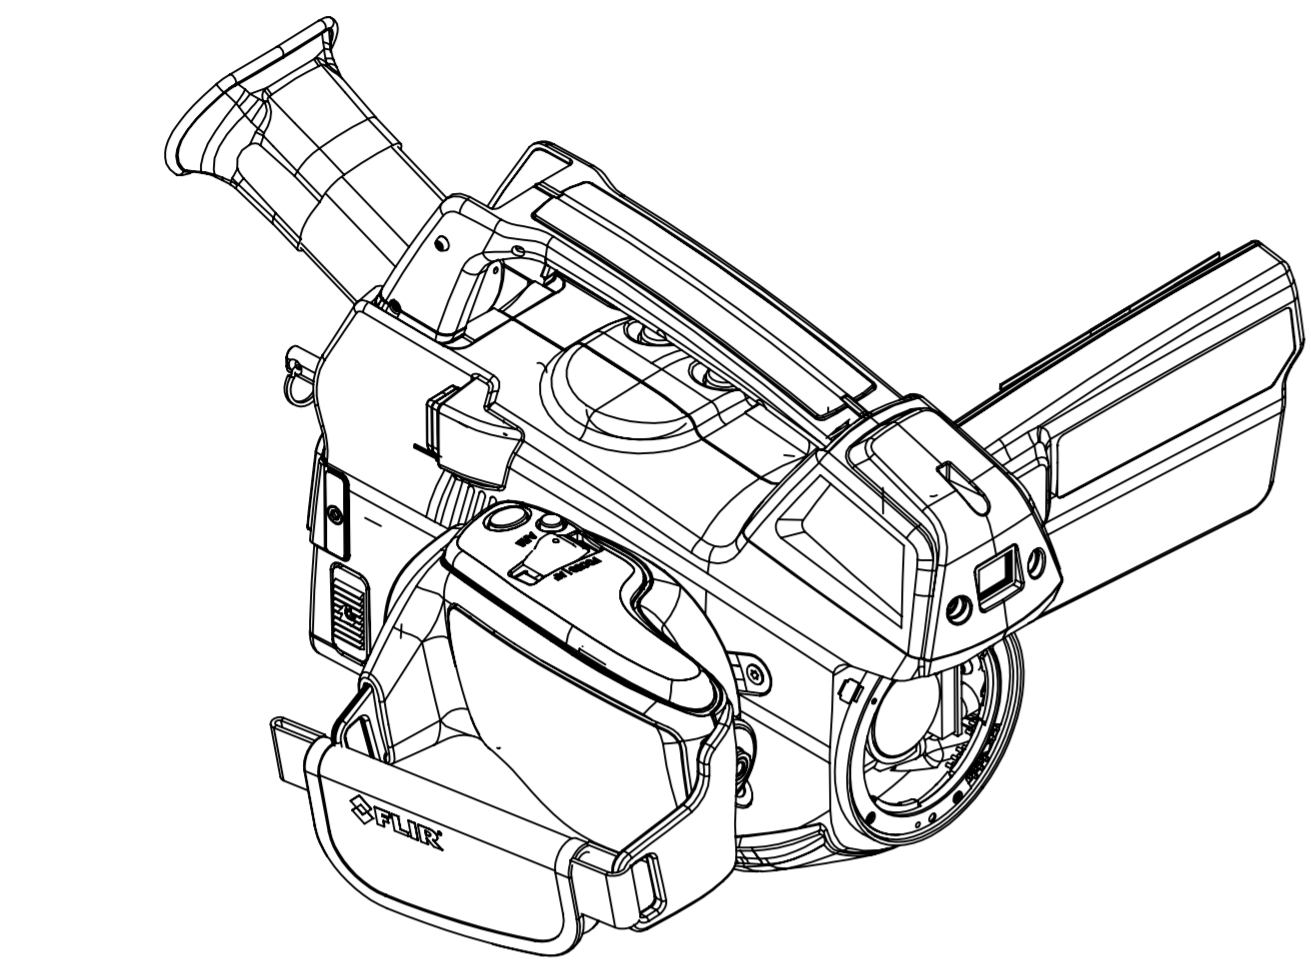

© 2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of FLIR Systems, Inc. Specifications are subject to change without notice. Dimensions are based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Deviation contrary to US law is prohibited.

Modified 2013-02-18	Check	Drawn by R&D Thermography	
Denomination			
Basic dimension FLIR GF3xx			Size A3 Scale 1:2 Drawing No. T127603
			Sheet 1(5) Size B

Camera with Lens IR f=23 mm (24°)  
 Camera with Lens IR f=38 mm (14,5°)

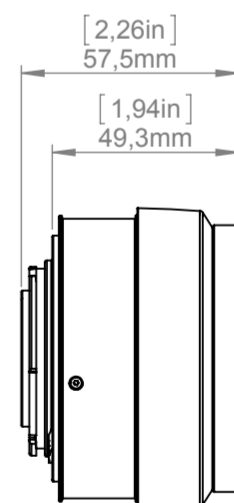
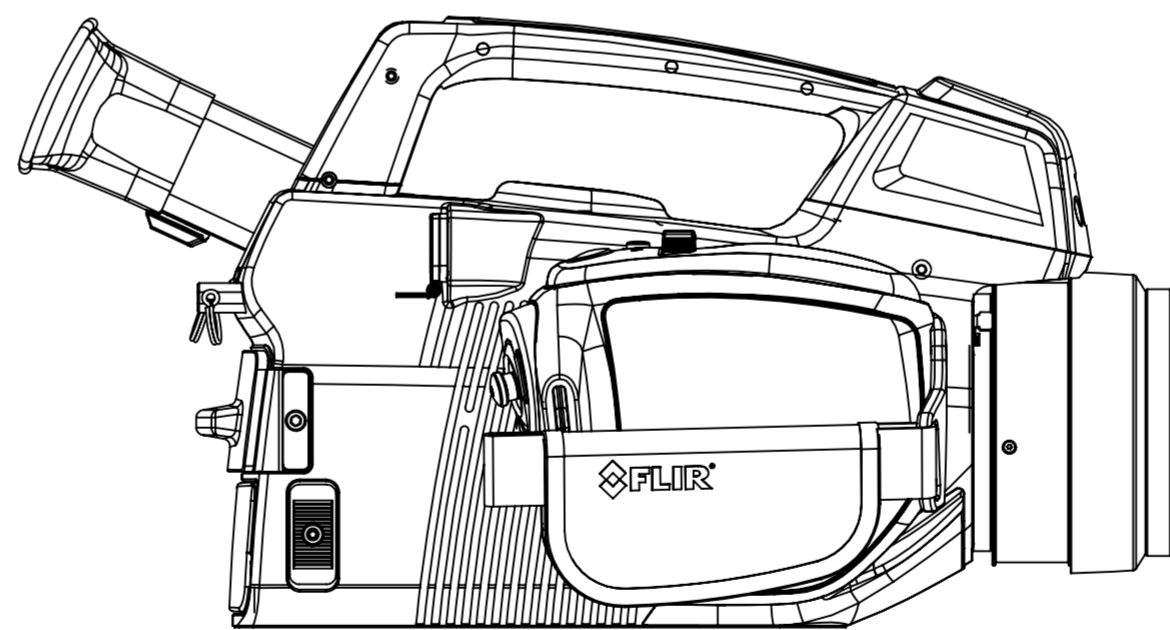
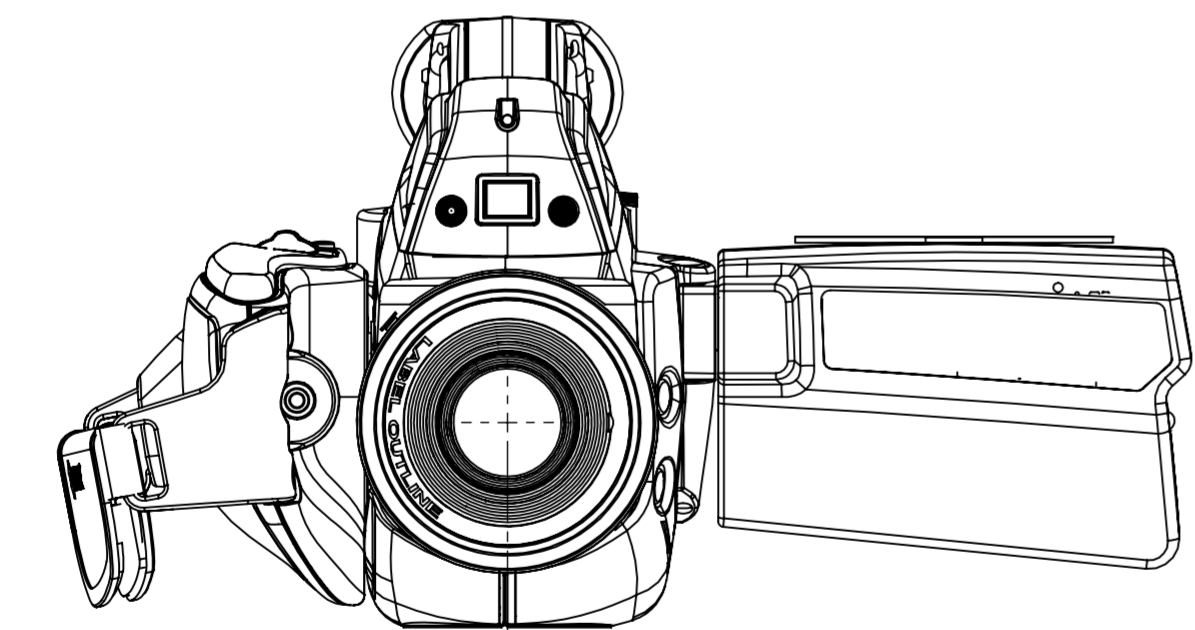
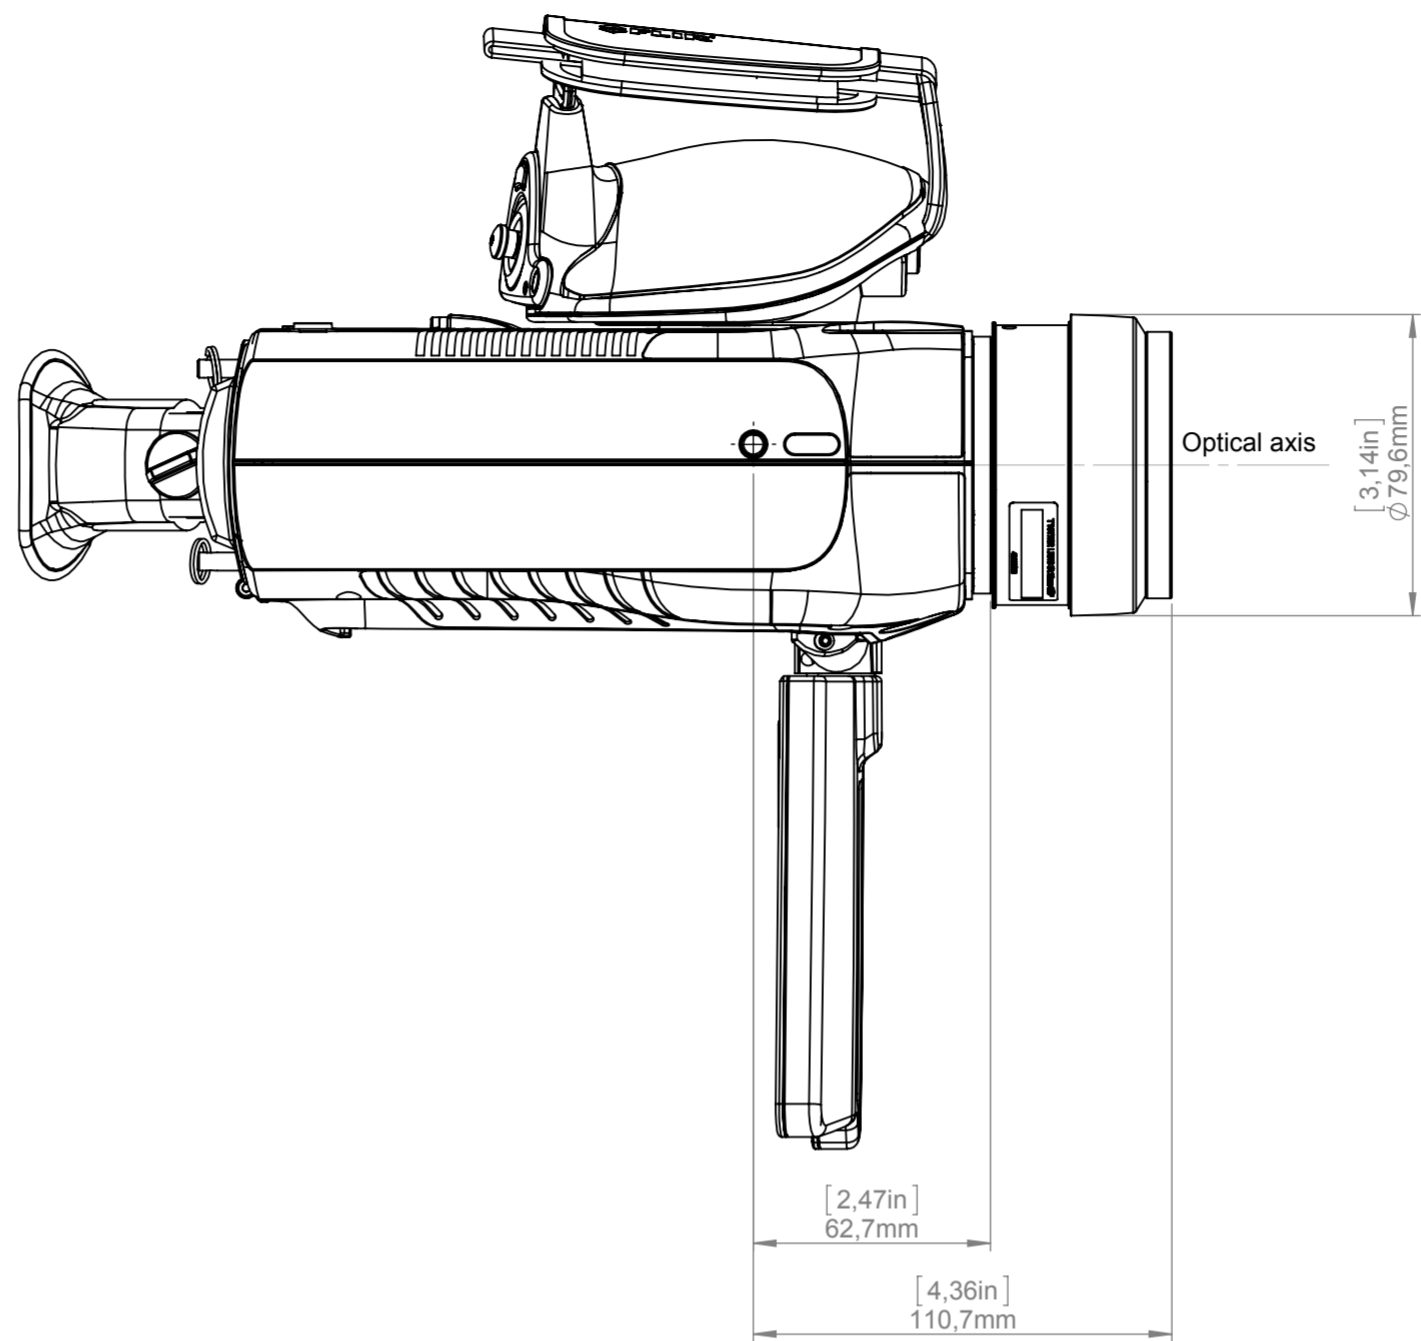
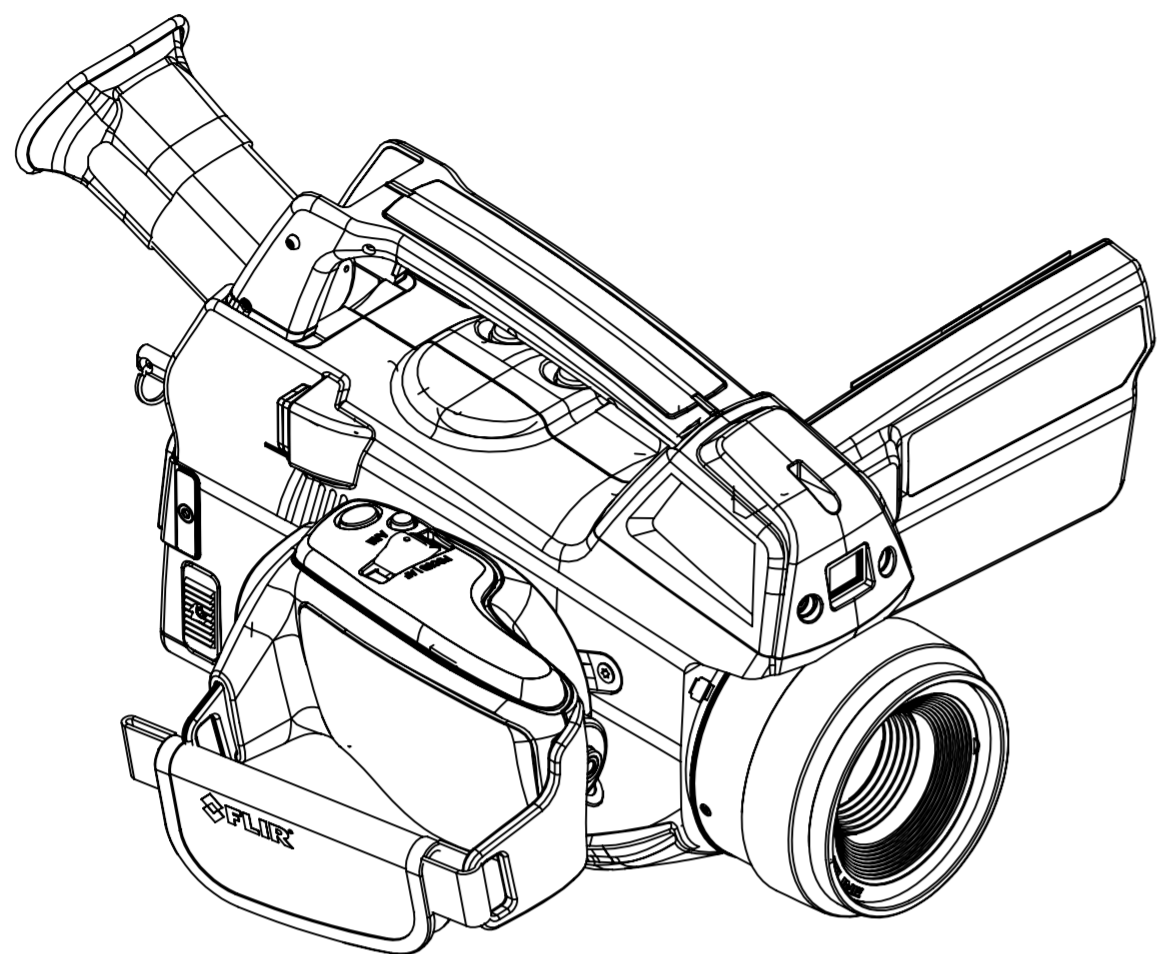


© 2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of FLIR Systems, Inc. Specifications are subject to change without notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

For additional dimensions see page 1

Modified 2013-02-18	Check	Drawn by R&D Thermography	
Denomination			
Basic dimension FLIR GF3xx			Size A3 Scale 1:2 Drawing No. T127603
			Sheet 2(5) Size B

Camera with Lens IR f=92 mm (6°)

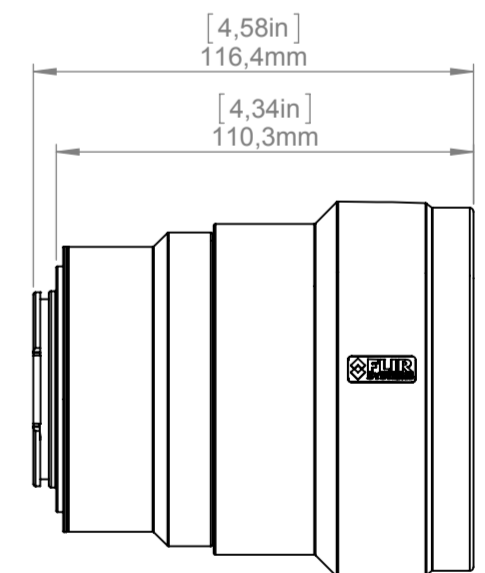
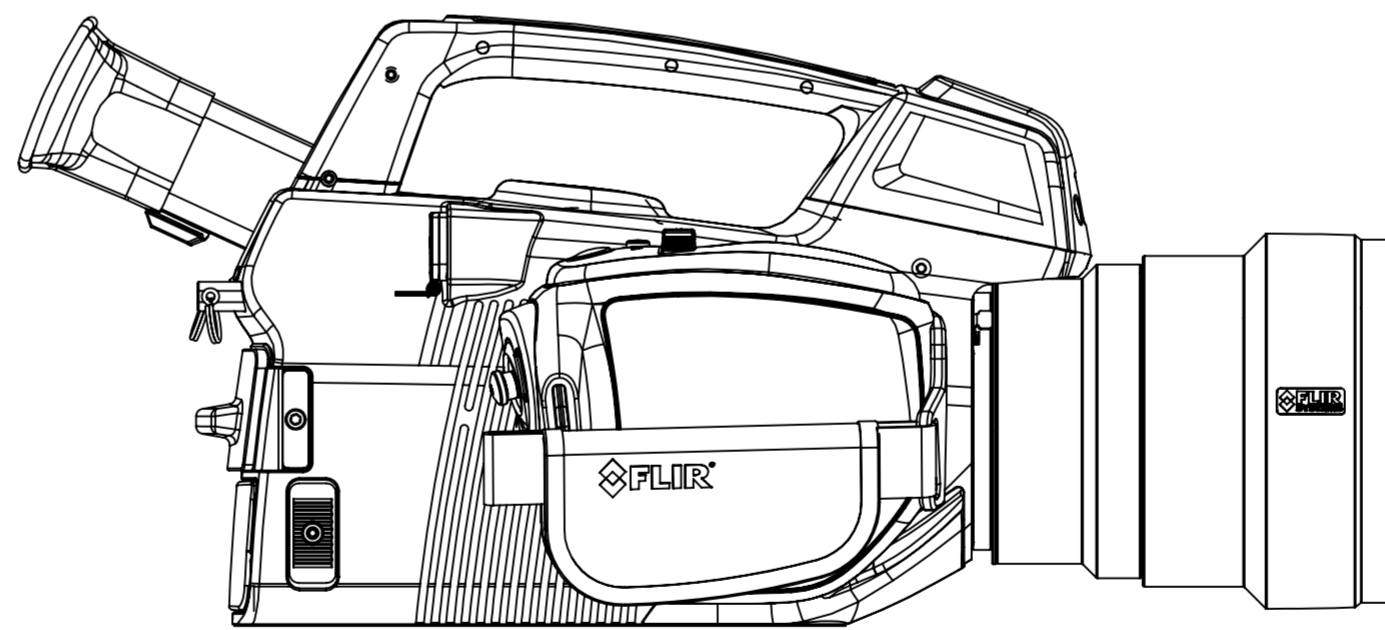
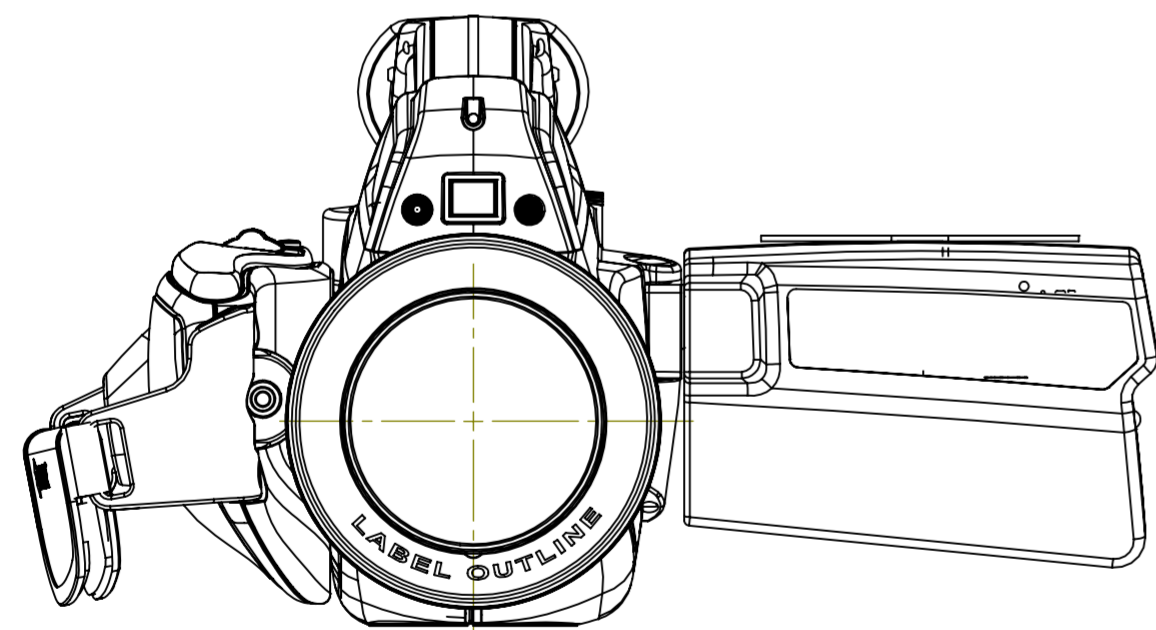
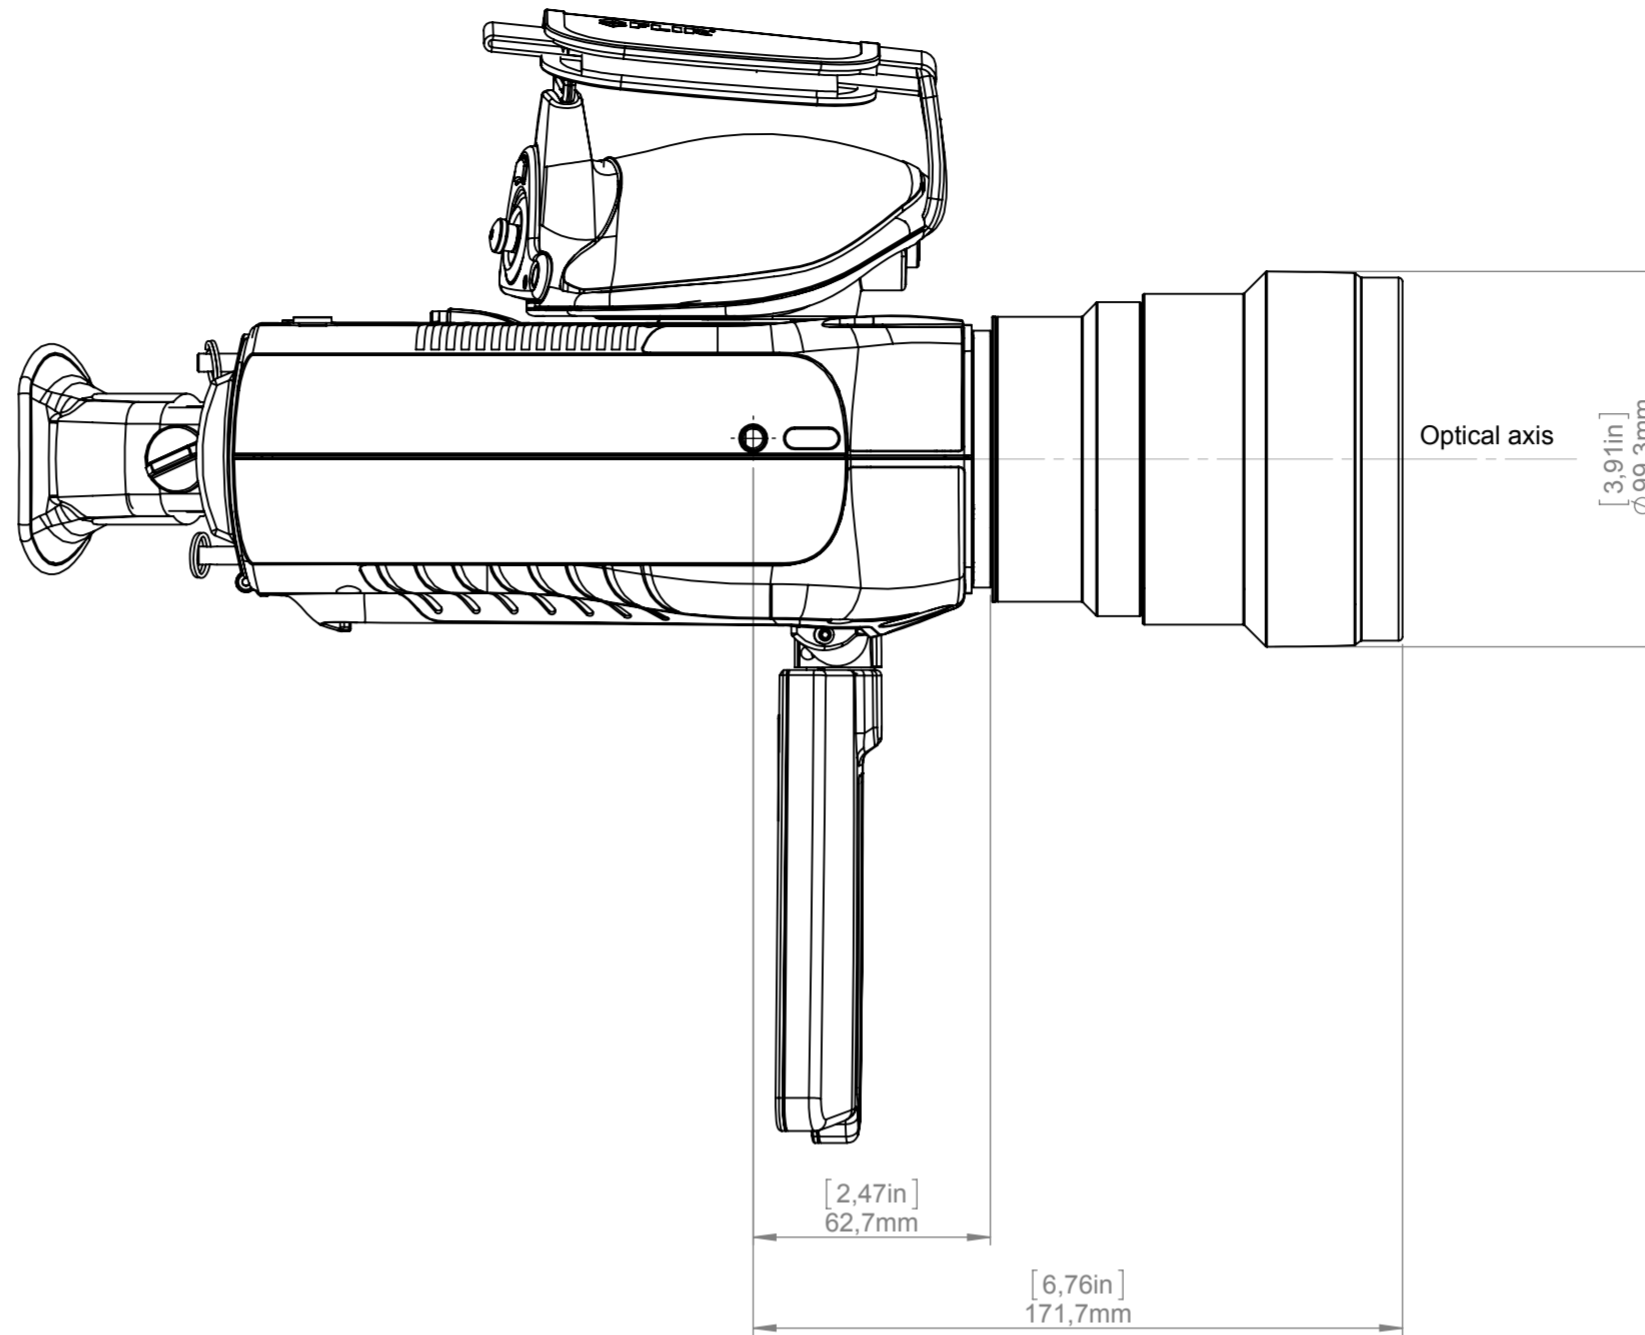
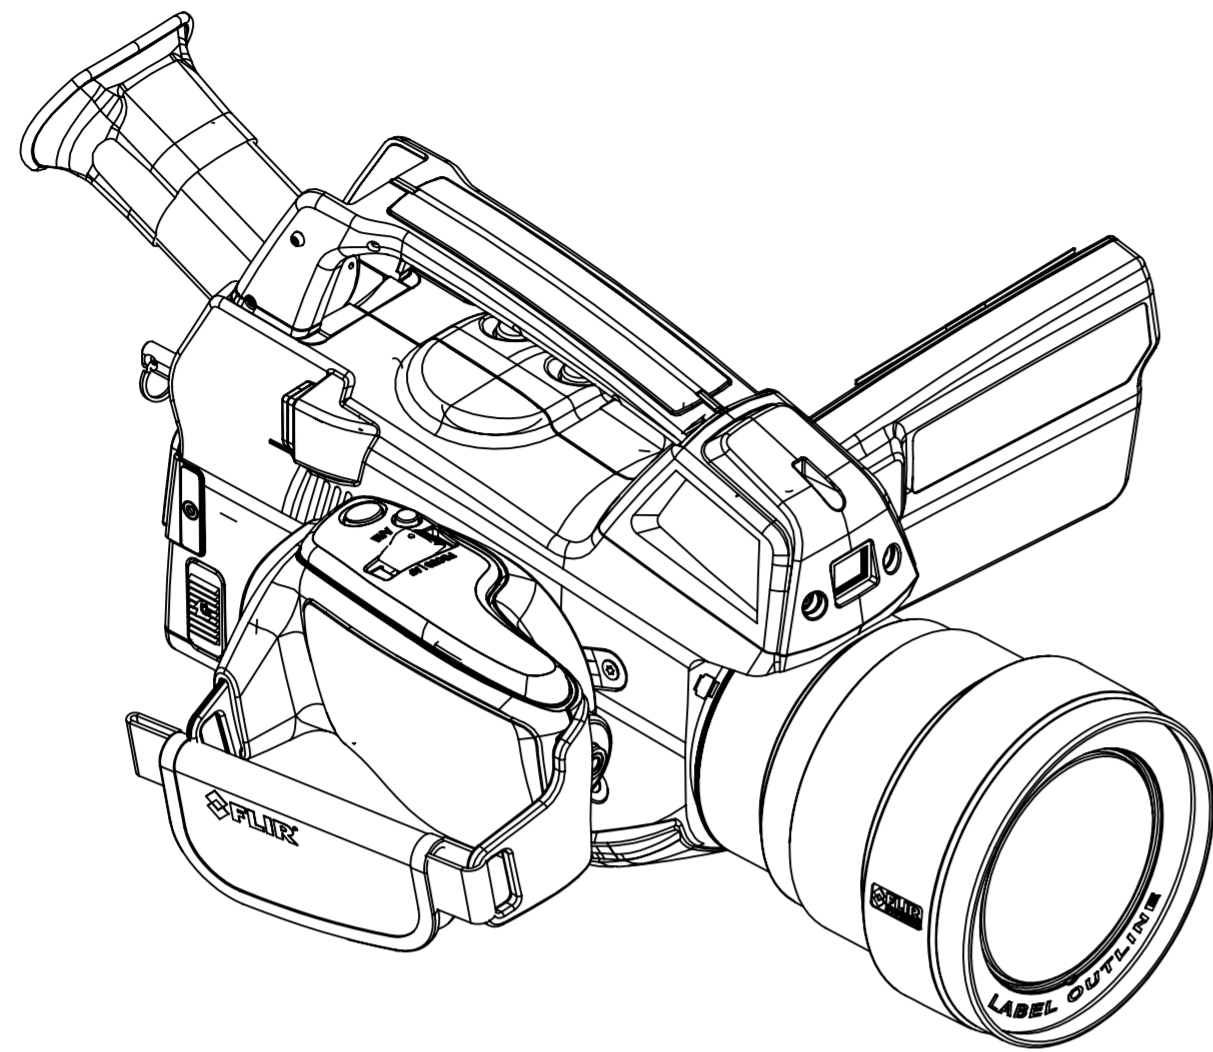


© 2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of FLIR Systems, Inc. Specifications subject to change without notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

For additional dimensions see page 1

Modified 2013-02-18	Check	Drawn by R&D Thermography	
Denomination			
Basic dimension FLIR GF3xx			Size A3 Scale 1:2 Drawing No. T127603
			Sheet 3(5) Size B

Camera with Lens f=23mm and extender

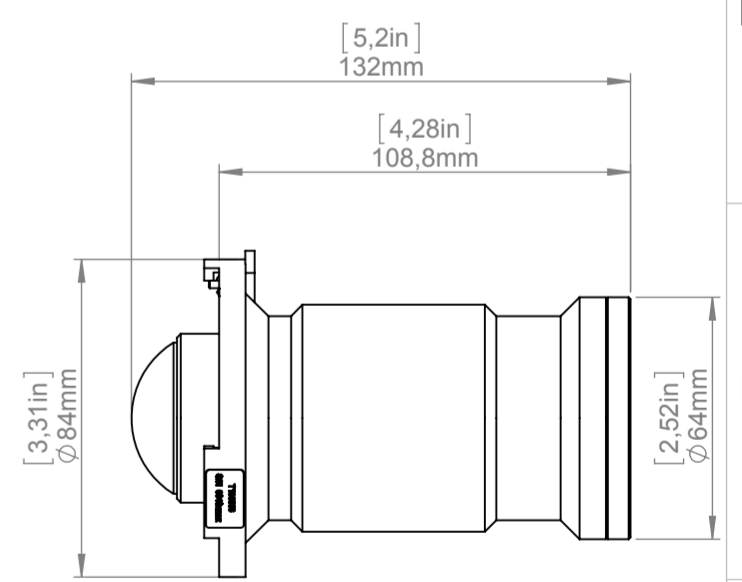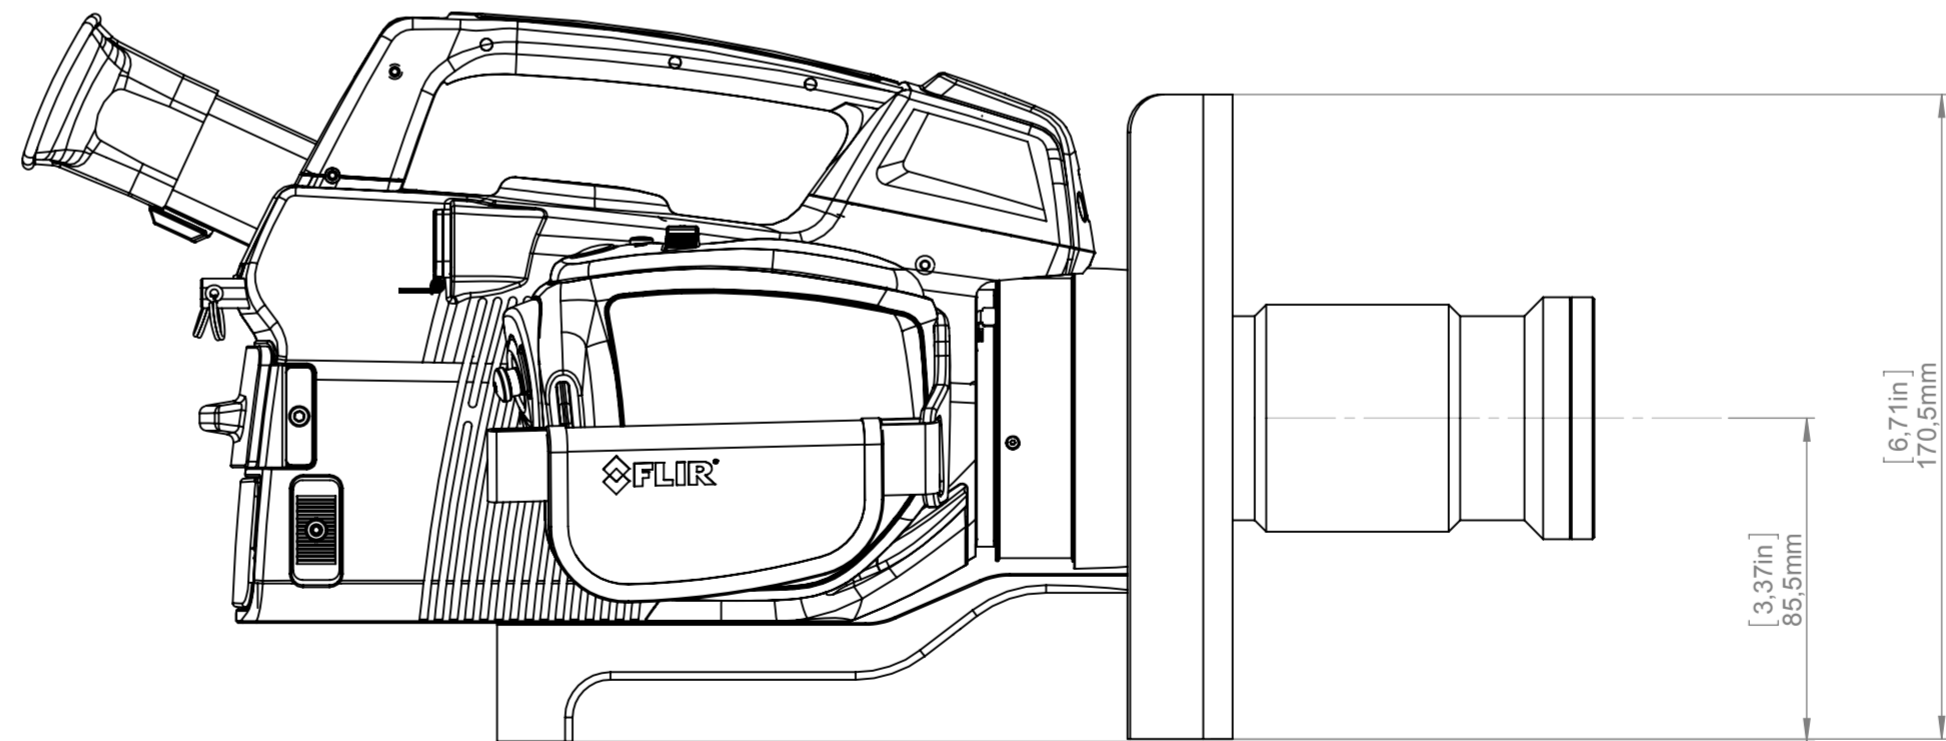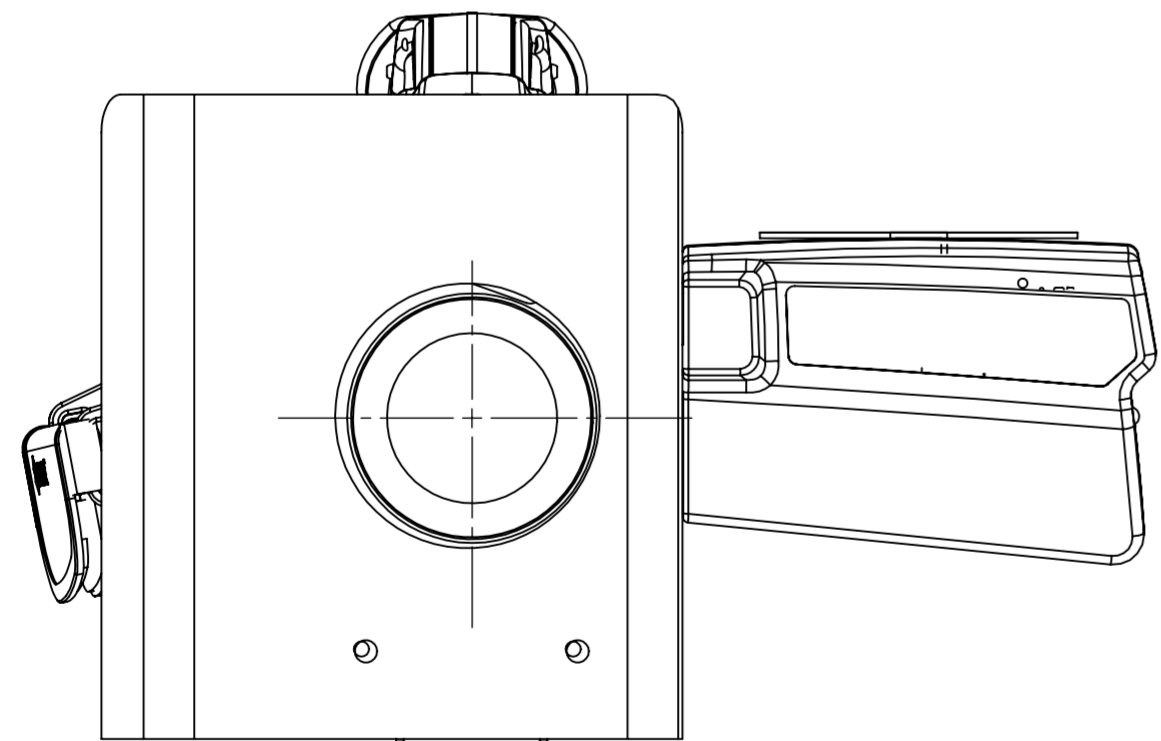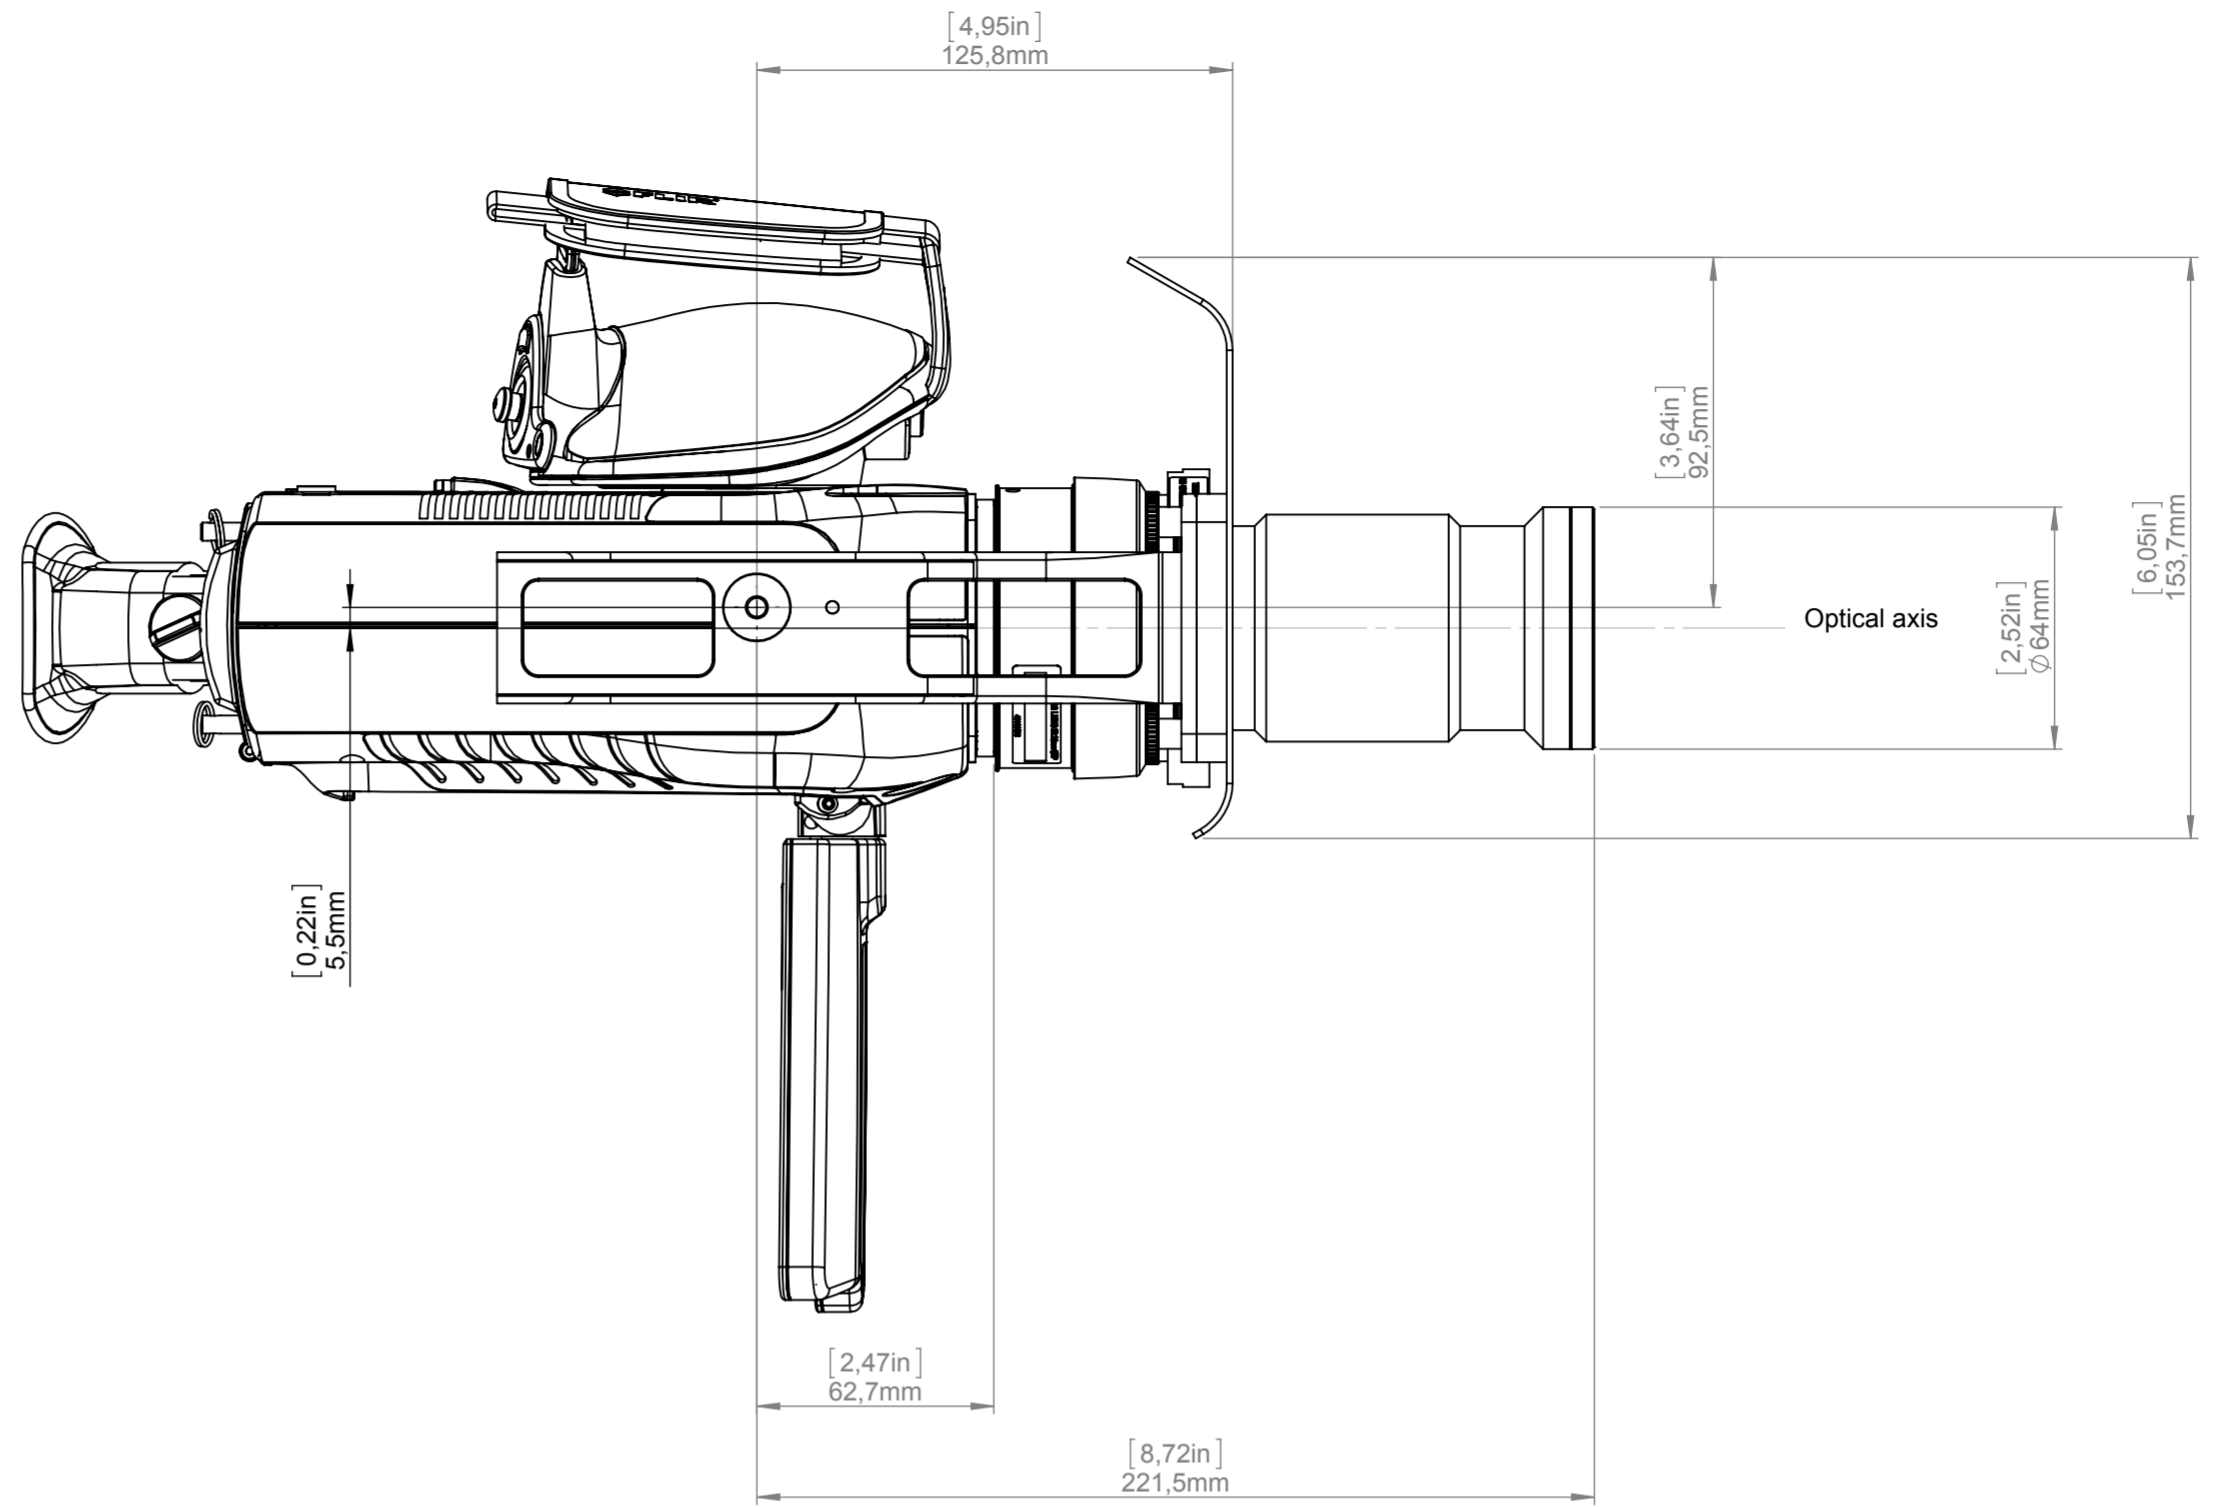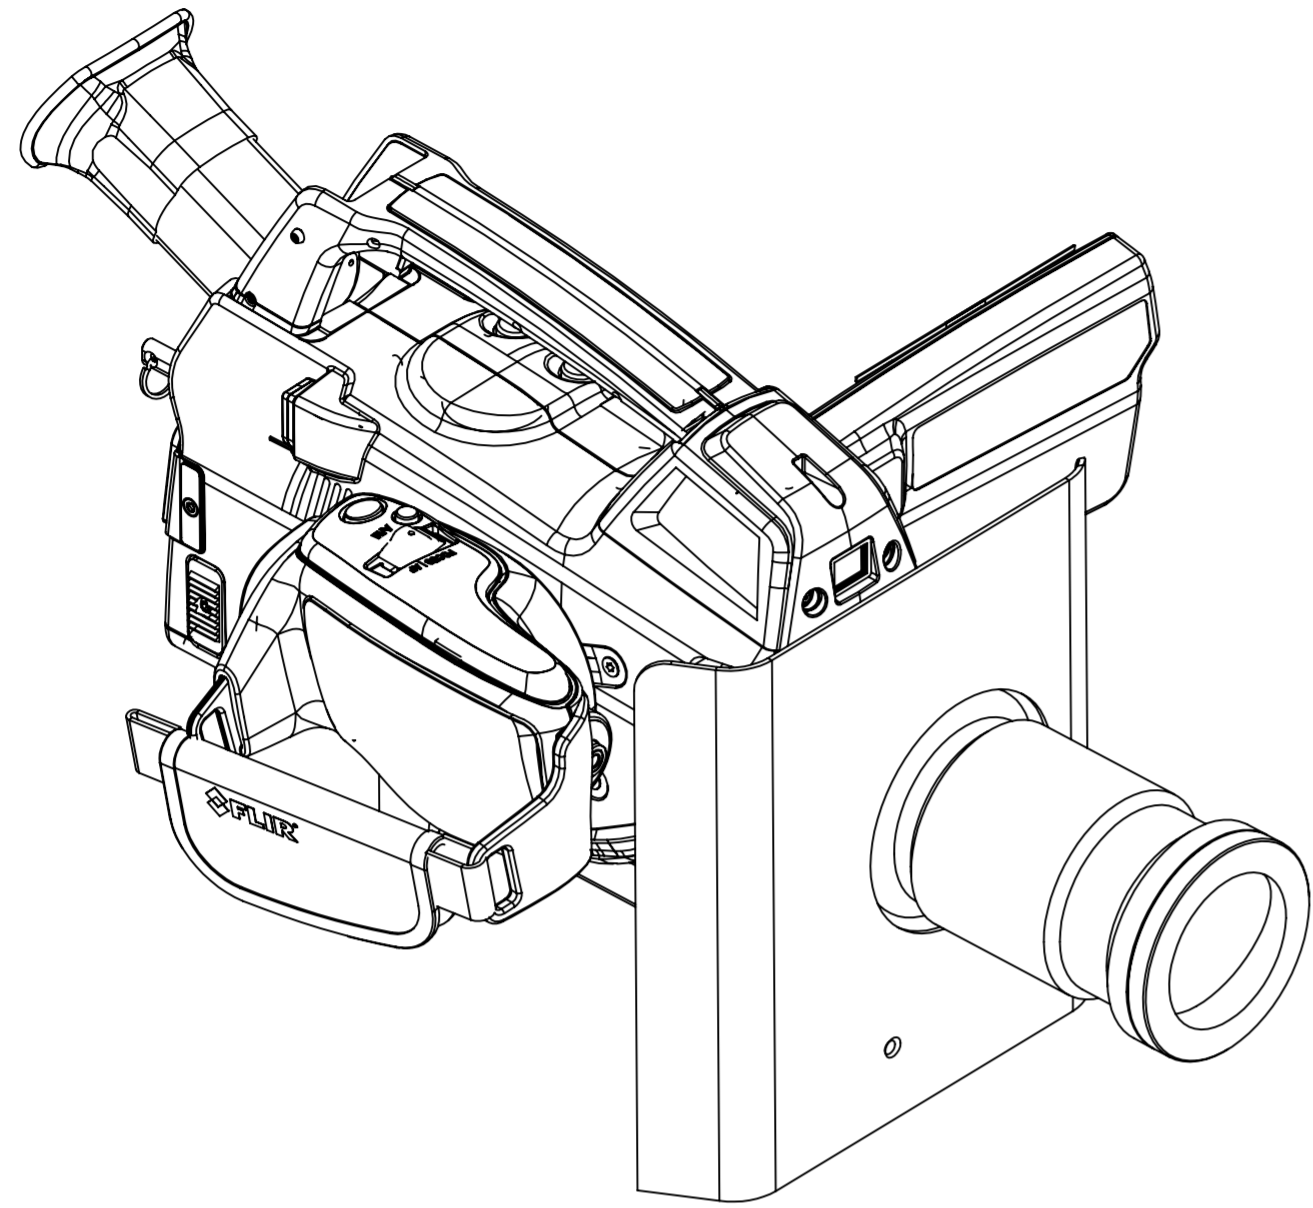





© 2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of FLIR Systems, Inc. Specifications subject to change without notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Division contrary to US law is prohibited.

For additional dimensions see page 1

Modified 2013-02-18	Check	Drawn by R&D Thermography	
Denomination			
Basic dimension FLIR GF3xx			Size A3 Scale 1:2 Sheet 4(5)
Drawing No. T127603			Size B



# Camera with Lens f=38mm and extender

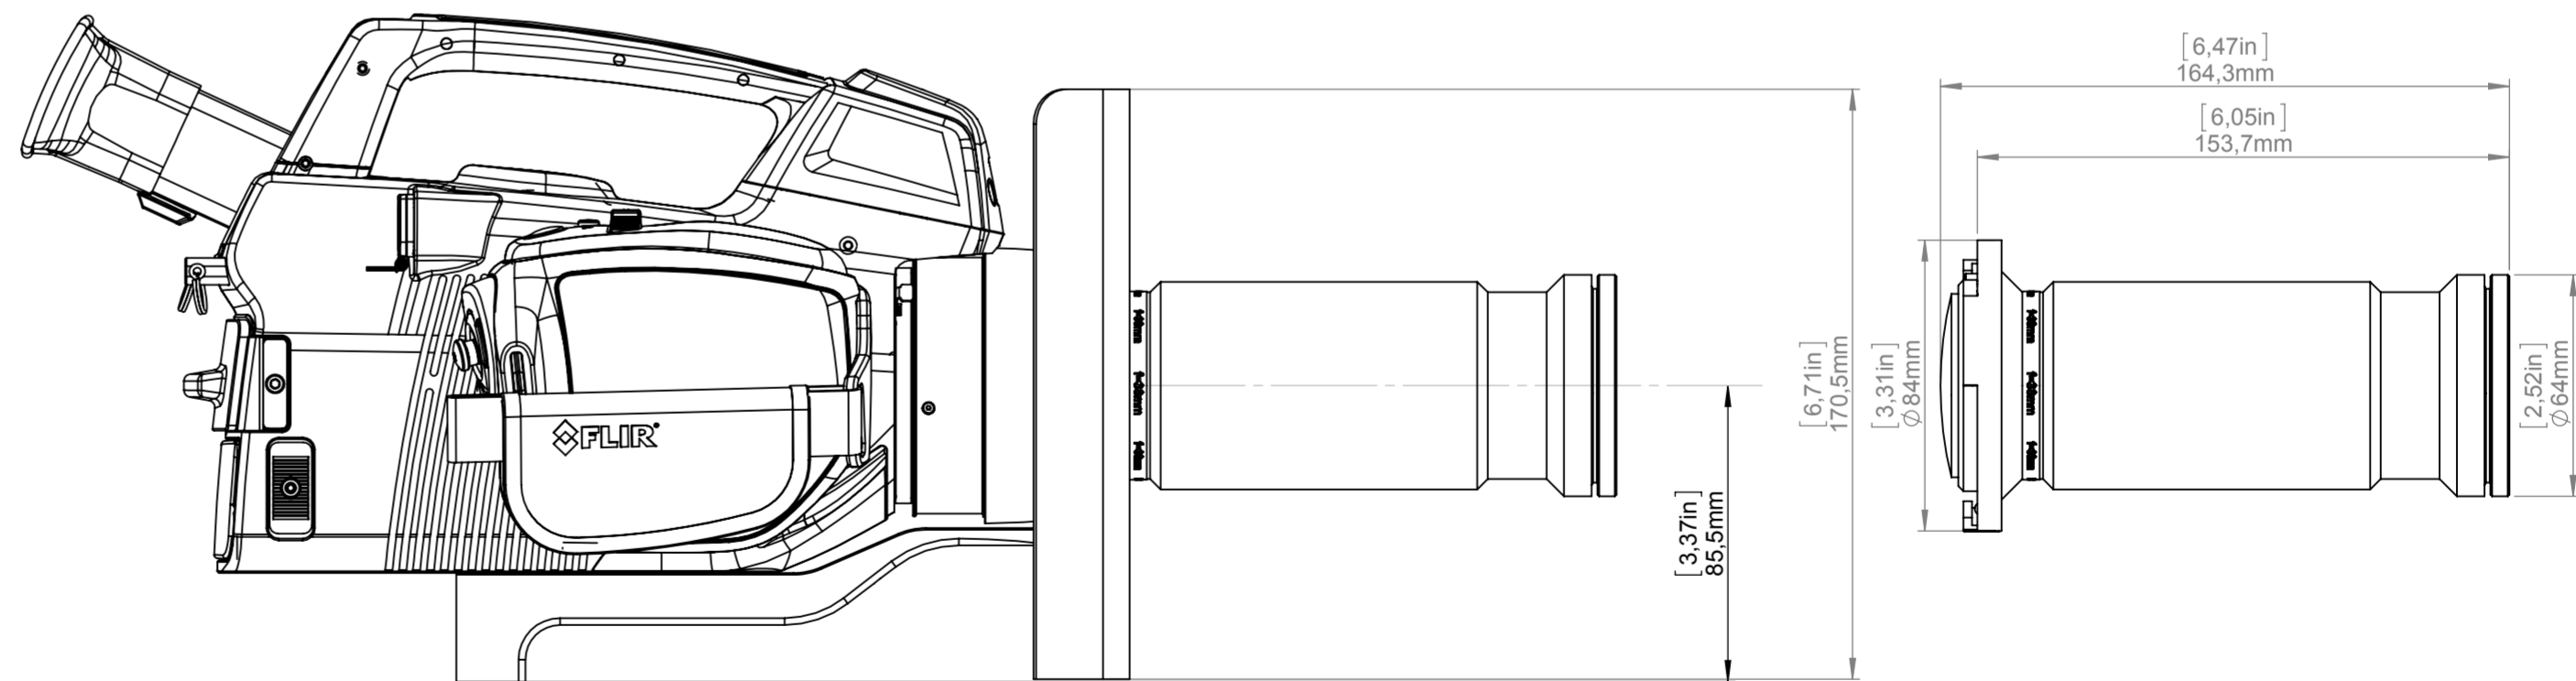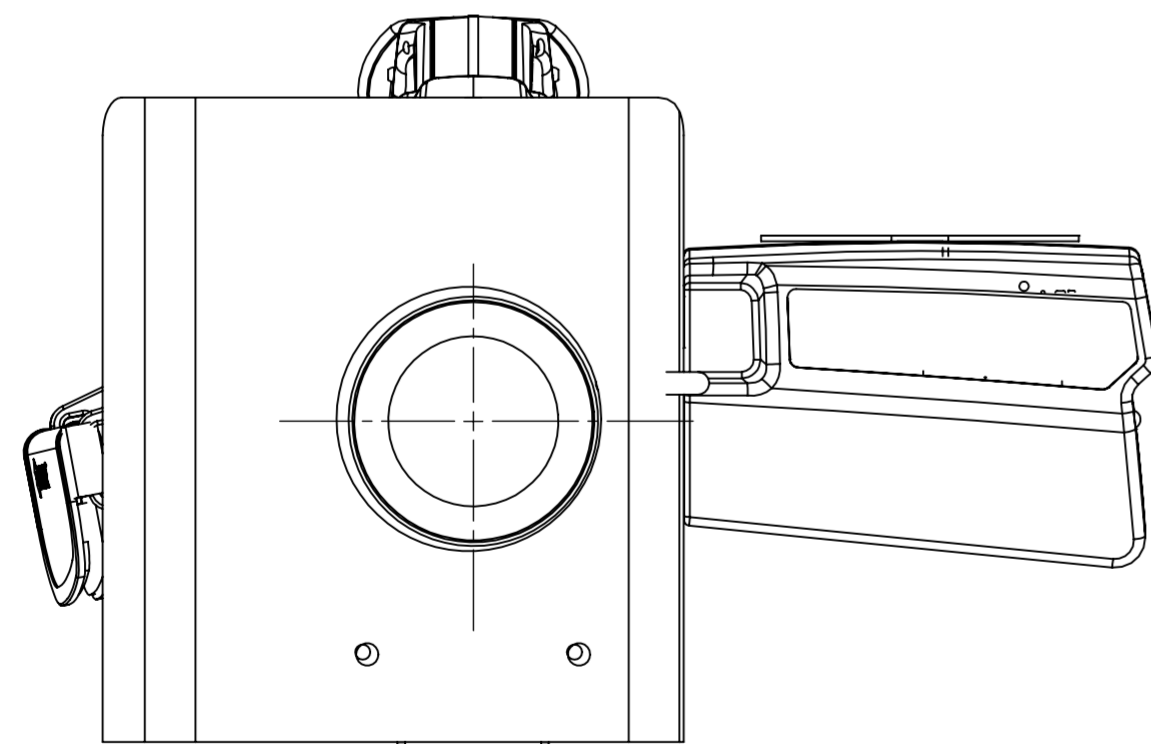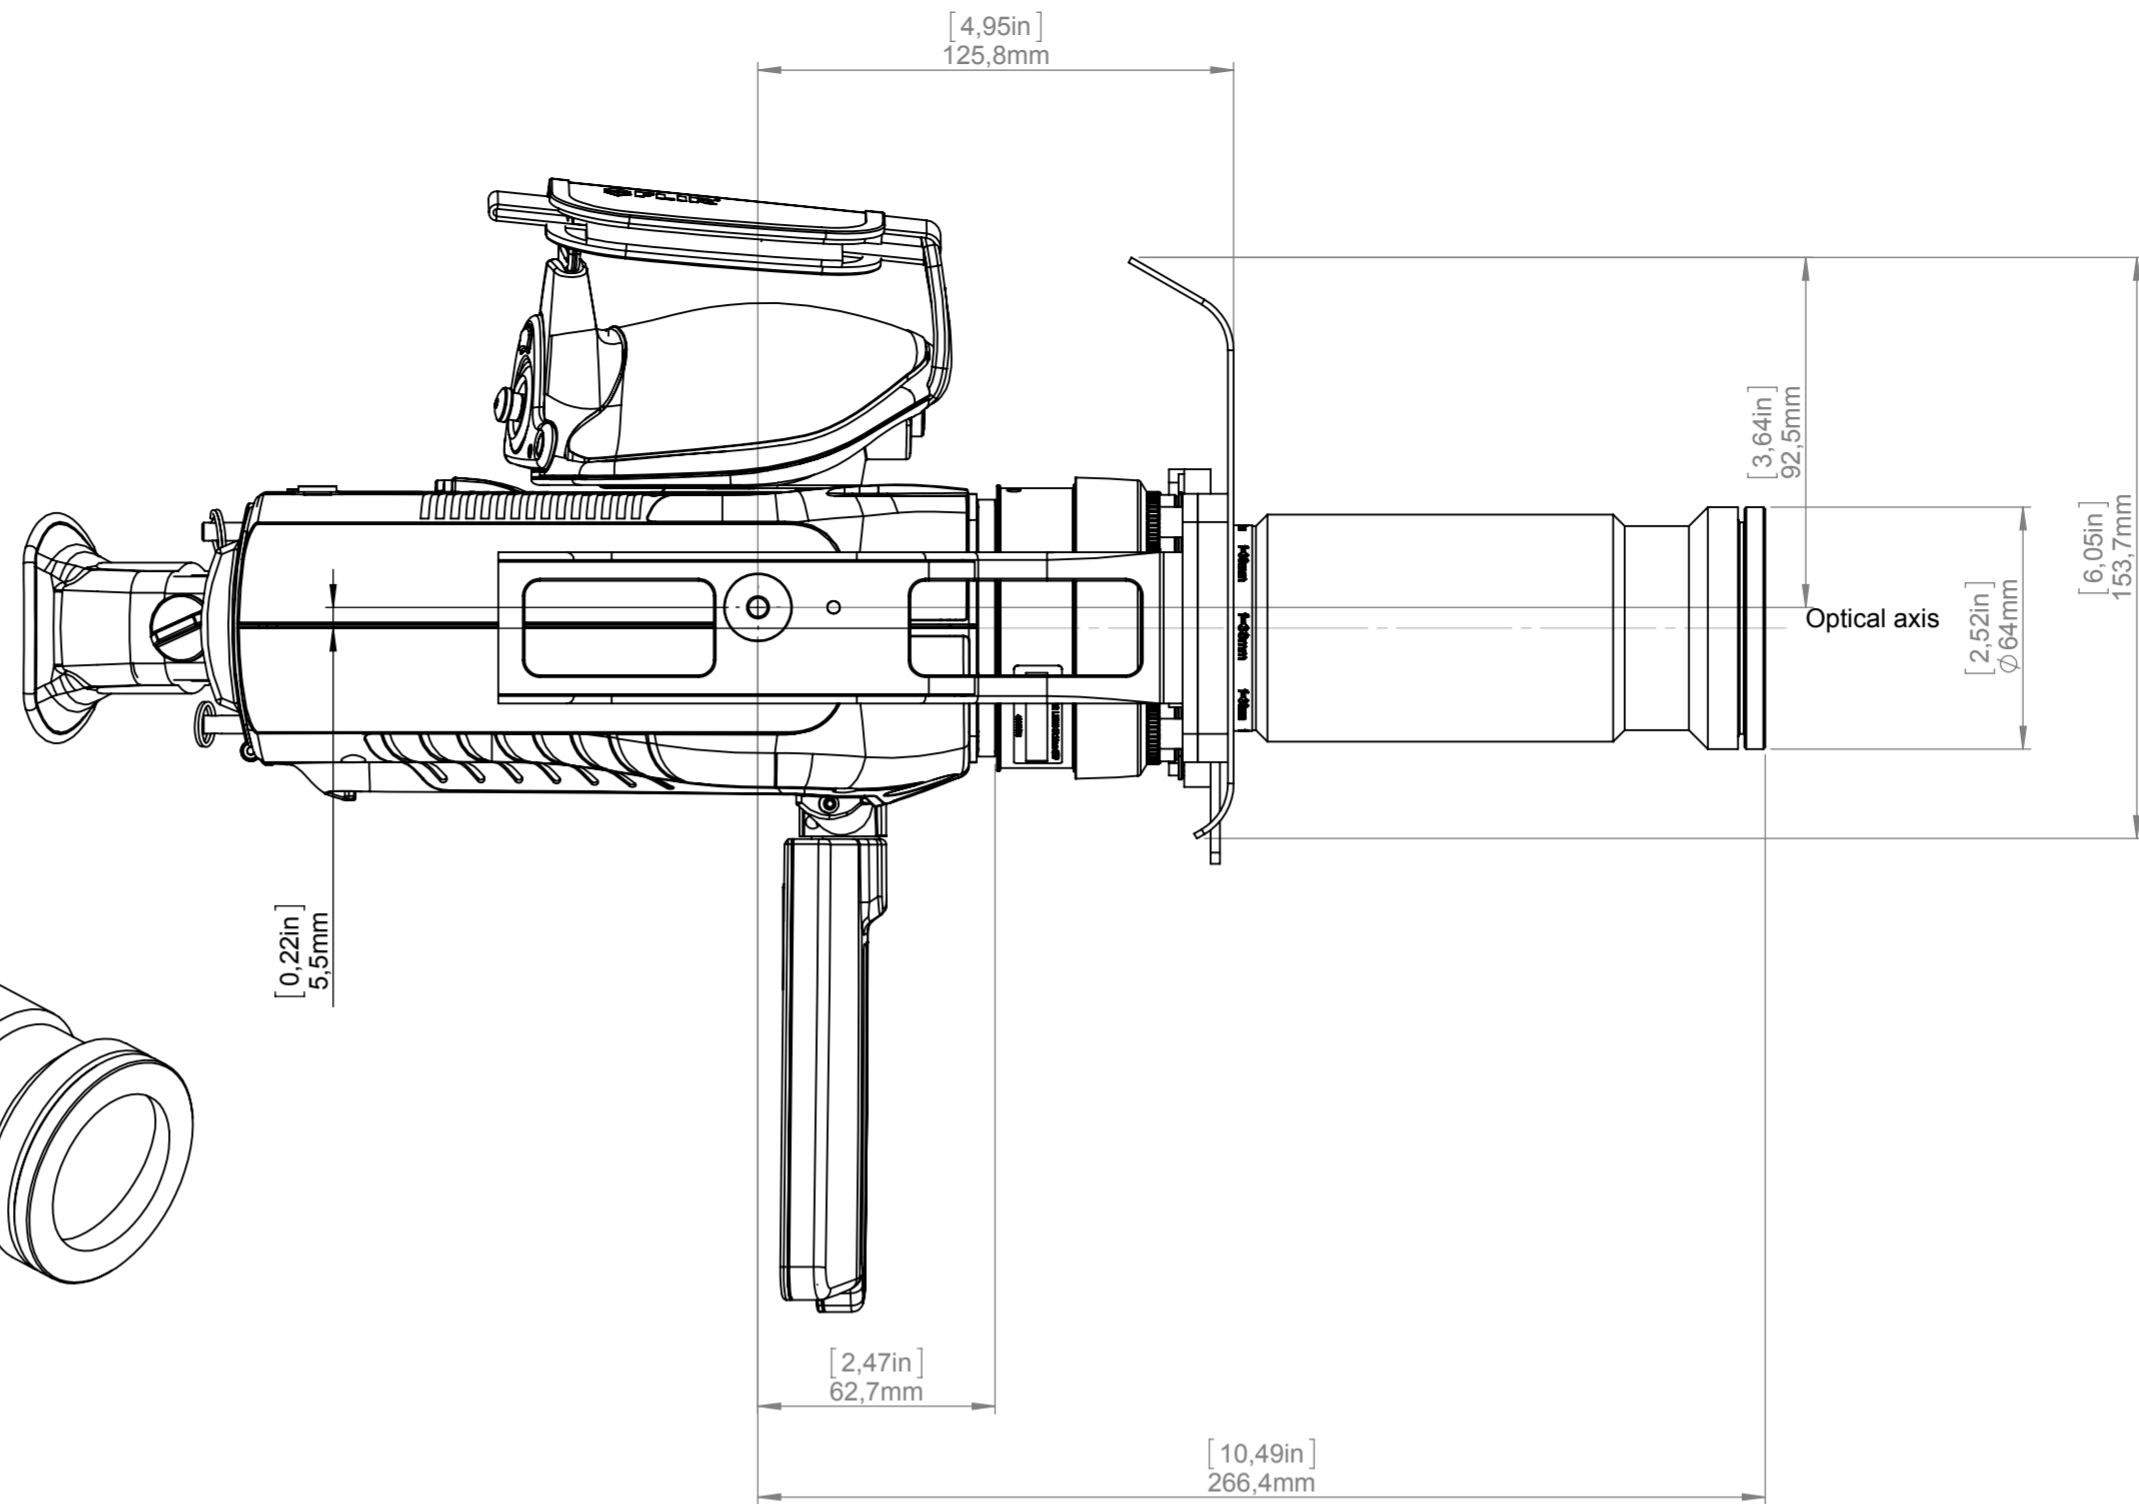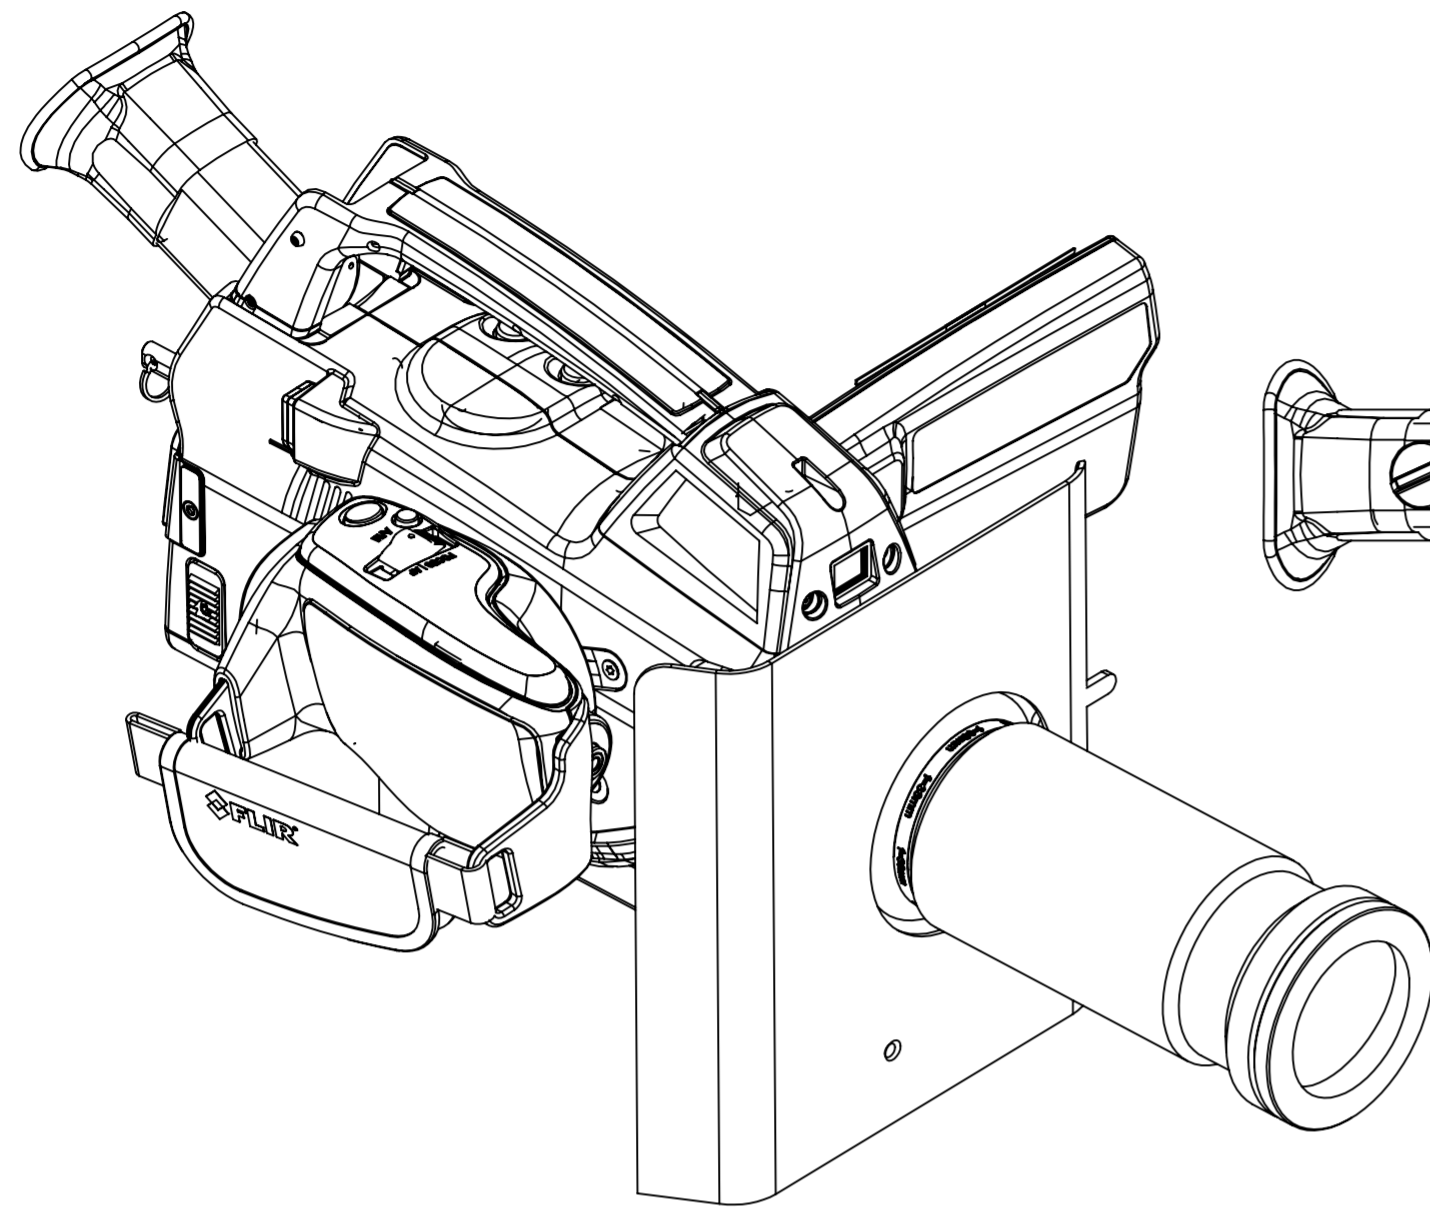

© 2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of FLIR Systems, Inc. Specifications subject to change without notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

For additional dimensions see page 1

Modified 2013-02-18	Check	Drawn by R&D Thermography	
Denomination			
Basic dimension FLIR GF3xx			Size A3 Scale 1:2 Sheet 5(5)
Drawing No. T127603			Size B